

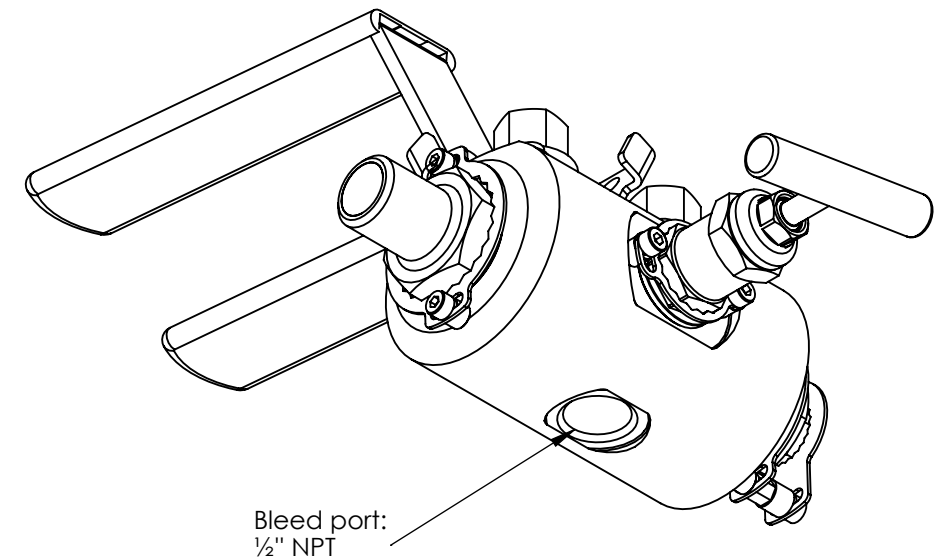
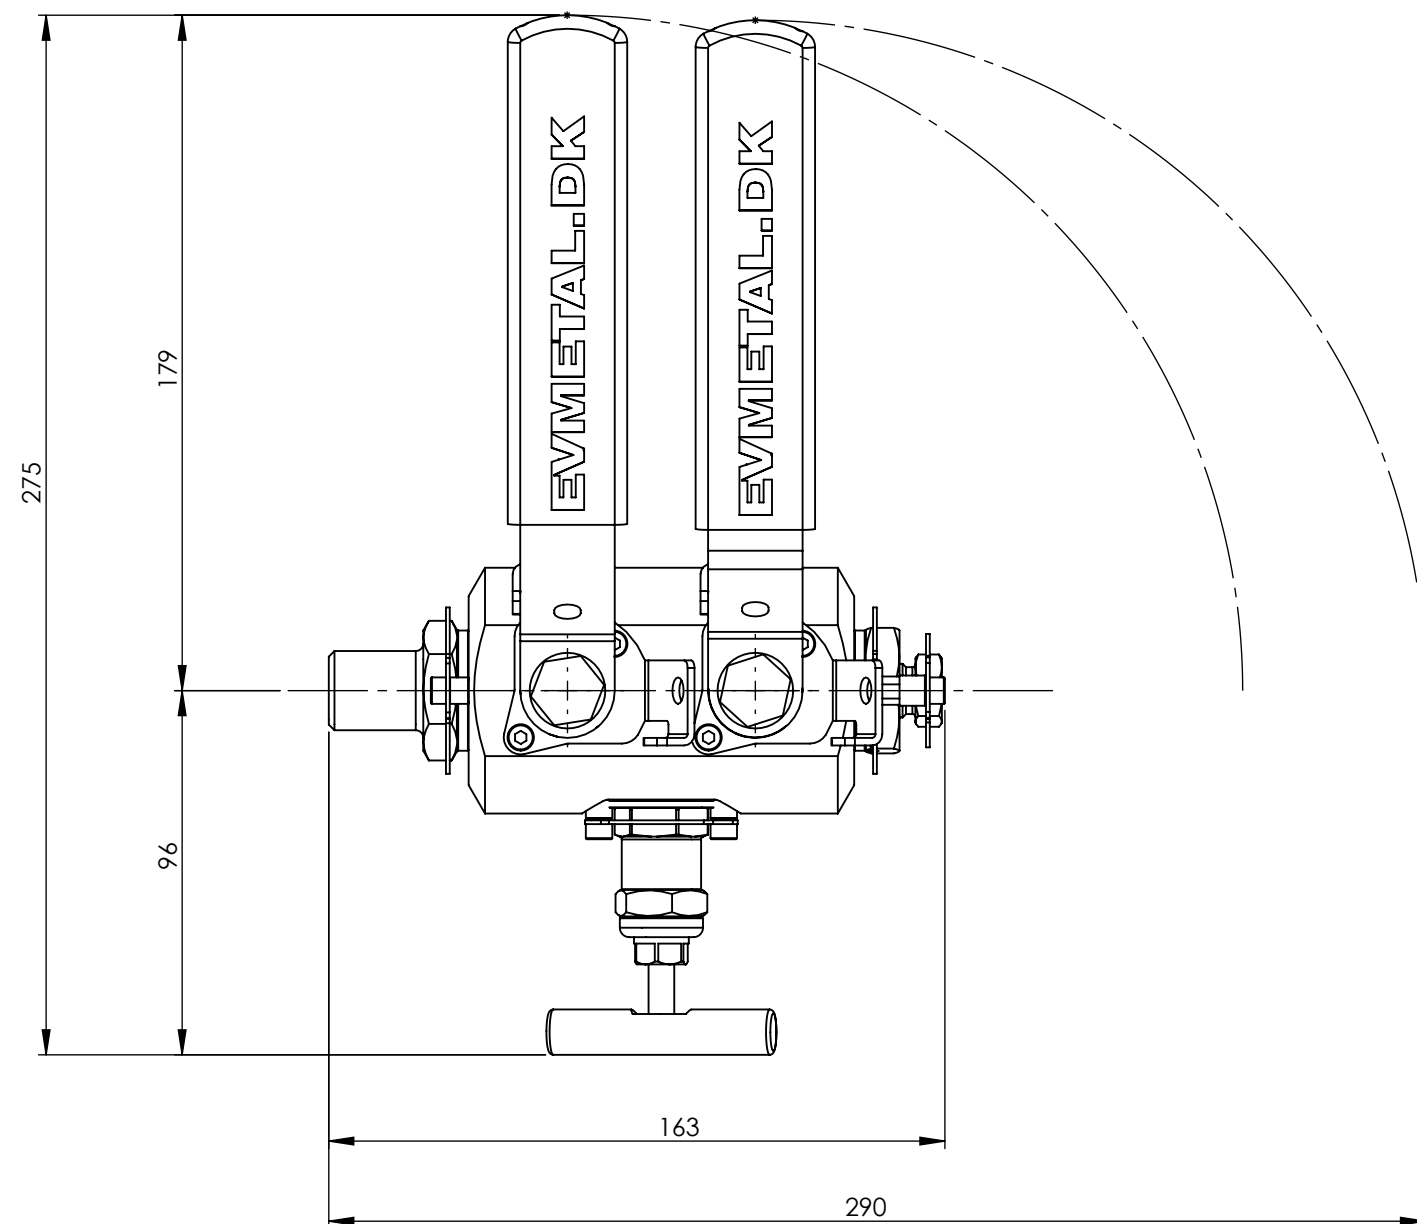
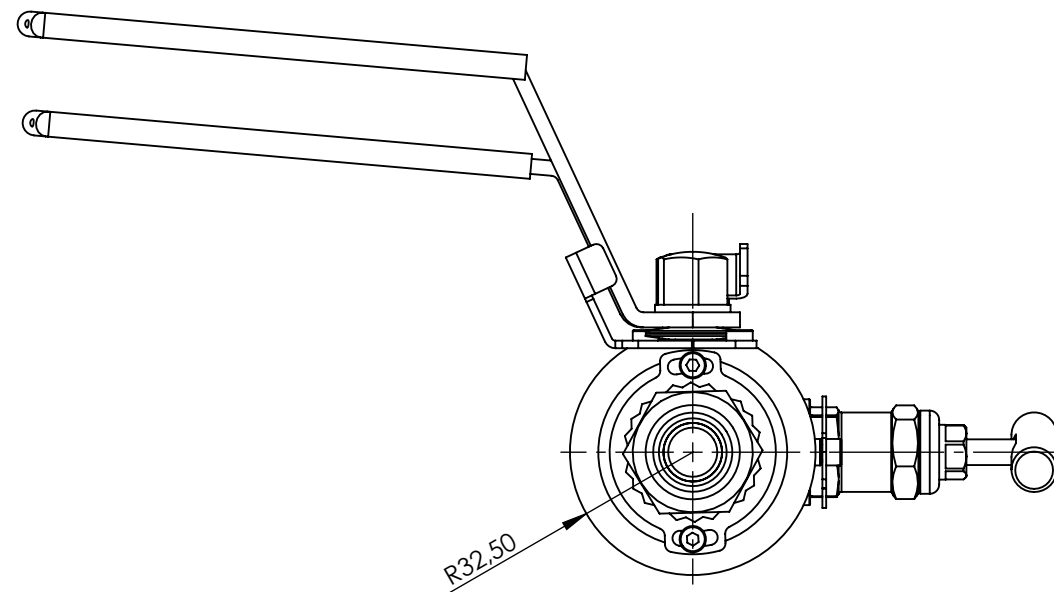


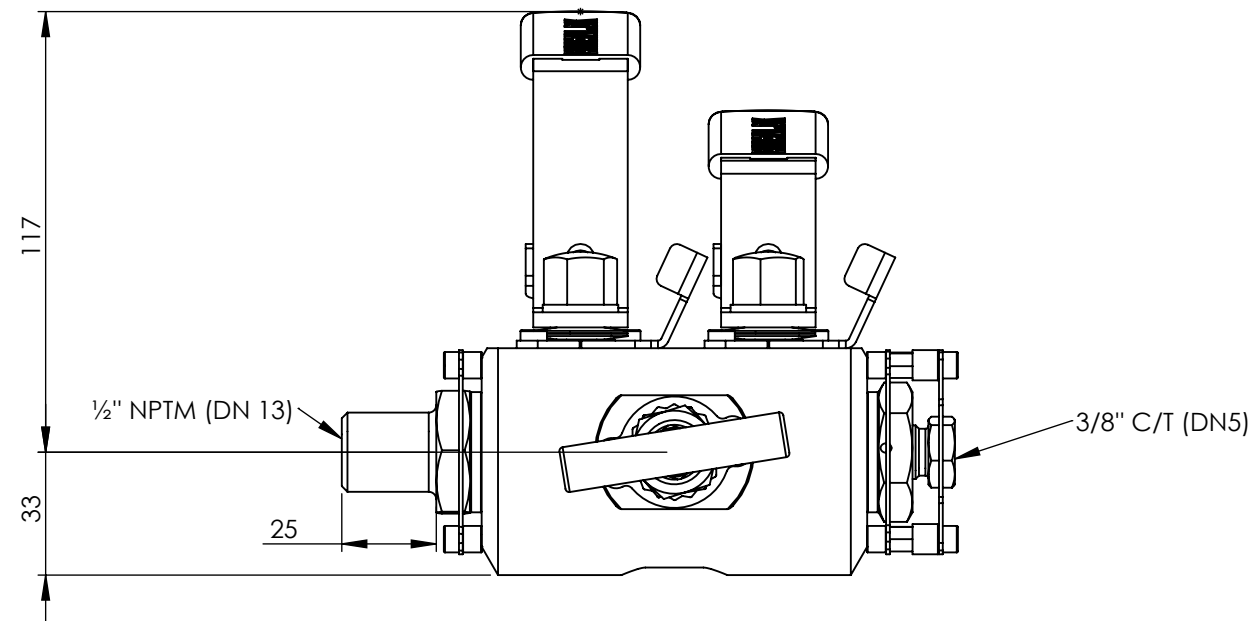

Specifikation:

Nominal pressure PN 448 barg (6500 psig) @ 20°C  
 Hydrostatic test pressure 672 barg (9750 psig) @ 20°C  
 Leak test: 493 barg (7150 psig) N2 @ 20°C  
 Ts min -20°C  
 Ts max 121°C  
 Material: EN 1.4404

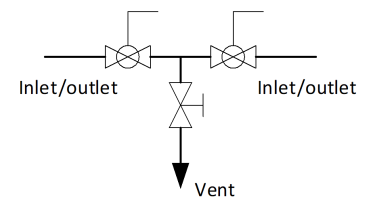

|                                                                                |       |                                                   |              |          |             |             |  |
|--------------------------------------------------------------------------------|-------|---------------------------------------------------|--------------|----------|-------------|-------------|--|
| A Drawing issued                                                               |       | 03.02.23-X                                        |              | B        |             |             |  |
| <div>EV</div> <div>EV METALVÆRK A/S<br/>RIBOVEJ 1<br/>DK-6950 RINGKØBING</div> | Scale | Date                                              | Drawn by     | Material | Requirement | Certificate |  |
|                                                                                | 1:2   | 02-06-25                                          | LKP          |          |             |             |  |
|                                                                                | A3    | Designation<br>DN 13 DBB, 3/8" C/T AV connections |              |          |             |             |  |
|                                                                                |       | Dwg. nr.                                          | Customer nr. |          |             |             |  |
|                                                                                |       | 1000-806                                          |              |          |             |             |  |